

ENTRYPROX



NORTHERN ACCESS CONTROL

ENTRYPROX provides single-door proximity access control for up to 2000 users. It is ideal for small installations or remote locations when used in conjunction with an online system. When users are prepared to upgrade to a full-function online system, ENTRYPROX can easily be switched to Wiegand output mode and connected to any OEM controller.

This Stand Alone Reader is compatible with all 26-bit HID proximity cards or keytags. It can also enroll most OEM or Corporate 1000 format cards and keytags up to 37-bits. The built-in keypad allows programming and PIN entry.

ENTRYPROX also features a detachable antenna module that can be mounted up to 10' away from the control unit. The attractive durable unit can be mounted indoors or outdoors.


BENEFITS

- Designed for indoor and outdoor use, can be glass mounted
- Offers optional use of a card, PIN code, or combination card and PIN
- Transaction information includes time, date, user number and ID
- Wiegand output mode for use with an access control panel

FEATURES

- Store up to 2000 users and 1000 time-stamped transactions
- Compatible with all HID proximity cards and keytags
- Four different access levels are available for added security
 - Toggle-Latch Strike
 - Normal Access
 - Transaction Mode
 - Lockout
- Detachable antenna module can be mounted up to 10 feet away from the control unit
- Batch enrollment capability for 26-bit format
- A 12-position keypad for PIN entry or programming
- Prints transactions via IR Link to optional hand-held printer
- Indicates door ajar or forced door conditions with alarm output relay
- Includes a request to exit button

ENTRYPROX

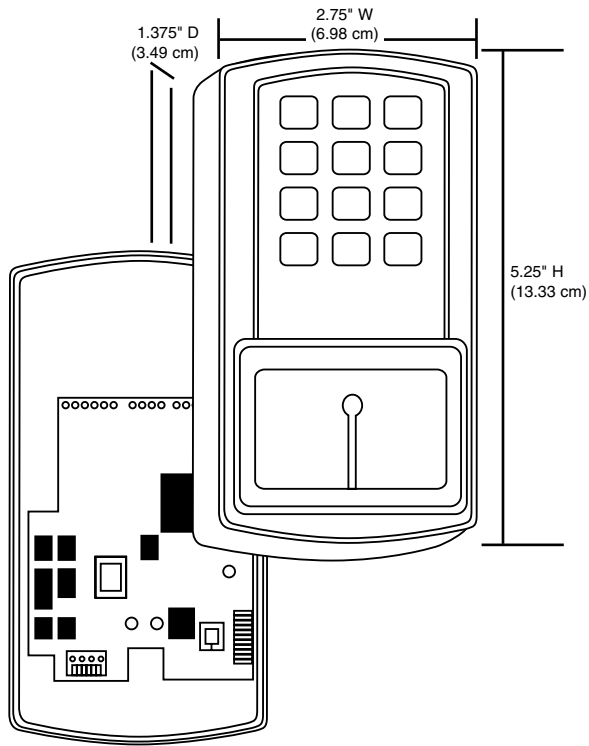

ORDERING INFORMATION

ENTRY-PROX	EntryProx Stand-Alone Reader
ENPROX-KIT1	EntryProx Stand-Alone Reader with 10 cards
ENPROX-KIT2	EntryProx Stand-Alone Reader with 10 keytags

OPTIONAL EQUIPMENT

ENPROX-PRN	EntryProx Infrared Hand-Held Printer
ENPROX-PP	EntryProx Printer Paper
ENPROX-ST	EntryProx Security Tool

Consult your Northern Sales Representative for more information.

SPECIFICATIONS

- **Dimensions** - 5.25" x 2.75" x 1.375" (13.33 cm x 6.98 cm x 3.49 cm)
- **Power Supply** - 10 VDC to 15 VDC, reverse voltage protected linear supply recommended, 150 mA at 12 VDC
- **Relay Outputs**
 - Strike Relay** - Form C, switches up to 4 A at 30 VDC
 - AUX Relay** - Form C, switches up to 1 A at 30 VDC
- **Monitor Inputs**
 - Door Position** - N.C. (normally closed) dry contact
 - Request to Exit** - N.O. (normally open) dry contact
- **LED** - Bi-color red and green, amber, Infrared (used with optional hand-held printer-ENPROX-PRN)
- **Operation**
 - Strike Time** - 1-99 seconds (adjustable)
 - Strike Mode** - Access Timer or Toggle/Latch
 - Door Ajar Time** - 10-990 seconds (adjustable)
- **Operating Temperature** - -22° F to 150° F (-30° C to 65° C)
- **Operating Humidity** - 5% to 95% relative humidity non-condensing
- **Cable Distance** (*Recommended cable is NC1861-BL-500, 6-conductor stranded with overall shield or equivalent*)
 - Remote Reader Module** - 10' (3 m)
 - Wiegand Interface** - 500' (152 m)